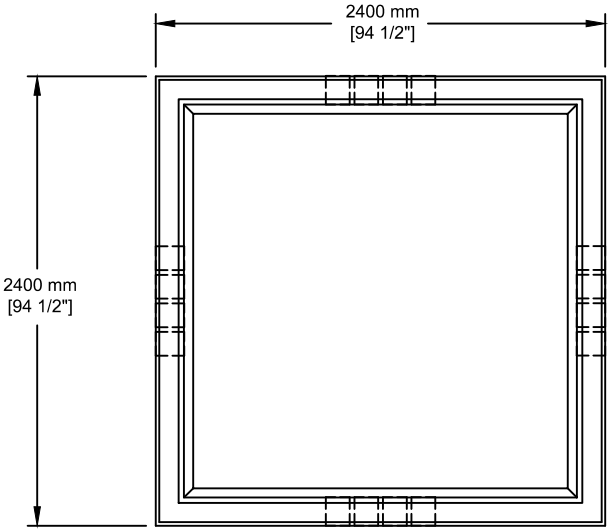

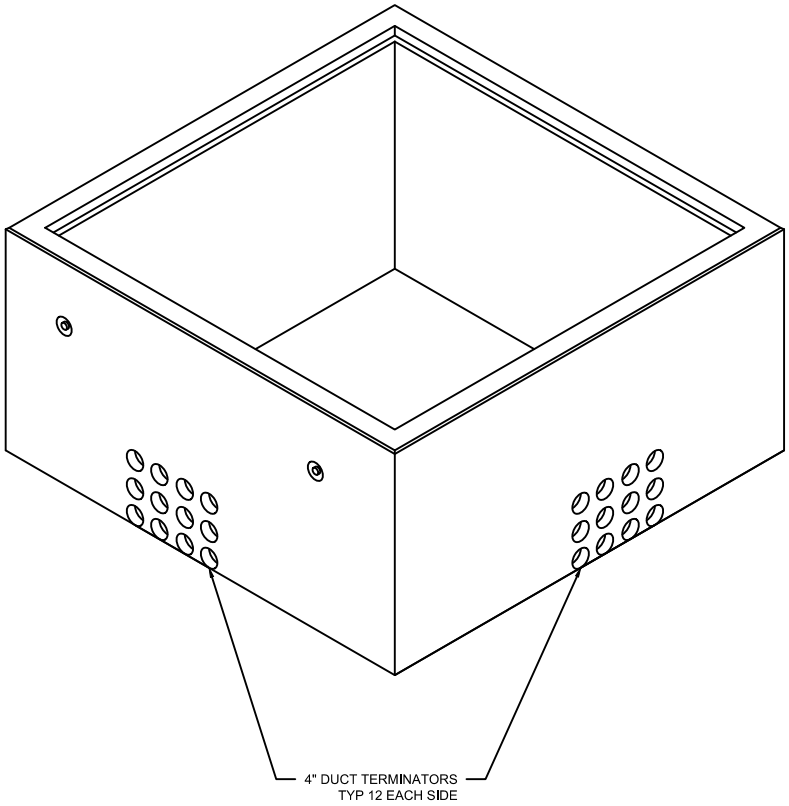

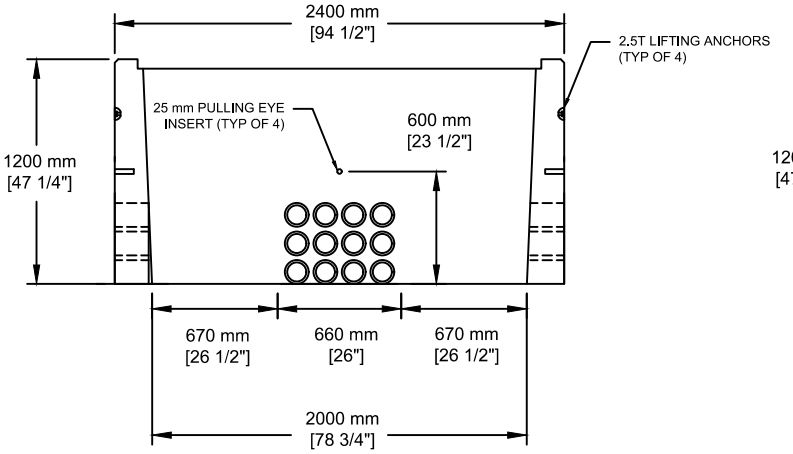

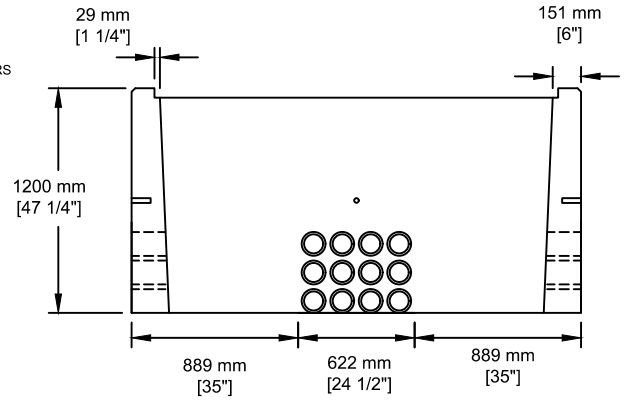

INSTALLATION INFORMATION

1 - CONCRETE, MINIMUM 28 DAYS STRENGTH TO BE 30Mpa - TYPE 50
2 - REINFORCEMENT TO BE WELDED WIRE FABRIC TO CSA G30.3-1983
3 - SUFFICIENT LAP STRENGTH FOR REINFORCEMENT SHOULD BE
PROVIDED TO ENSURE CONTINUITY OF REINFORCEMENT
4 - MINIMUM CONCRETE COVER FOR REINFORCEMENT
A)30MM FOR OUTSIDE FACE OF BOX PAD
B)20MM FOR INSIDE FACE OF BOX PAD
5 - MASS : 8935 LBS / 4060 KG
6 - BASE IS SIZED TO ACCOMMODATE 15KV - 25KV SWITCHGEAR
7 - UNLESS OTHERWISE INDICATED, ALL DIMENSIONS ARE IN MILLIMETERS
8 - 4 - 2.5T DOGBONE STYLE LIFTING ANCHORS

SOUTH OKANAGAN
CONCRETE PRODUCTS LTD
TEL: 250-495-7556
socp@socp.ca
www.socp.ca
Box 419, 11602 - 115 st Osoyoos, BC V0H 1V0
FAX: 250-495-3556

1595 Fortis Pad Mount Switcher Base

Product #

1129-SC