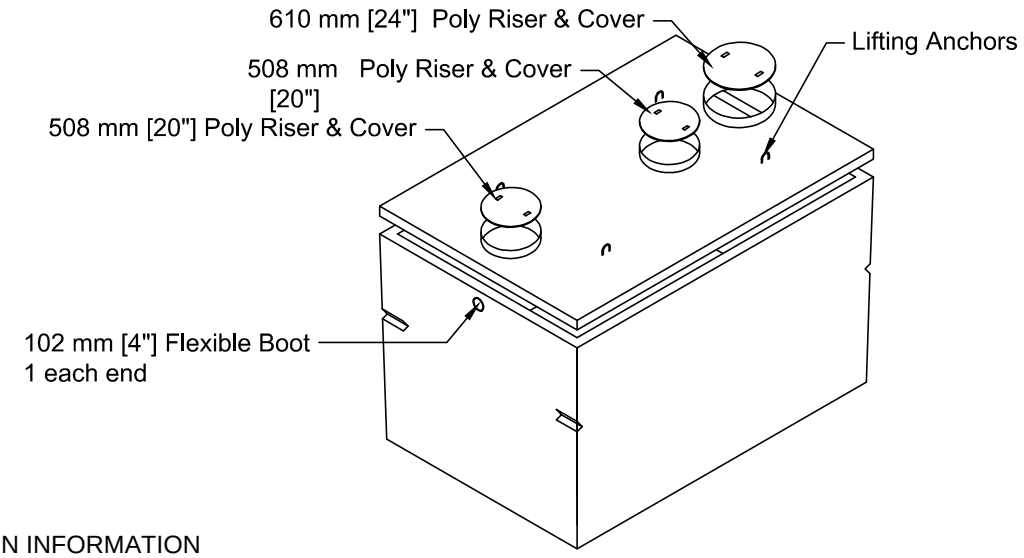

INSTALLATION INFORMATION

TANK - SPREADER BAR & CABLES FOR HANDLING
LID C/ 4 - 10 MM (3/8") R-ANCHORS FOR HANDLING
GASKET: CONSEAL BUTYL SEALANT
WEIGHT: 2900 LBS / 1315 KG (LID)
WEIGHT: 9458 LBS / 4290 KG (TANK)

DESIGN SPECIFICATION

RESIDENTIAL LOADING
BURIAL DEPTH - **NO GREATER THAN 1M** ASTM C1227
CSA B-66

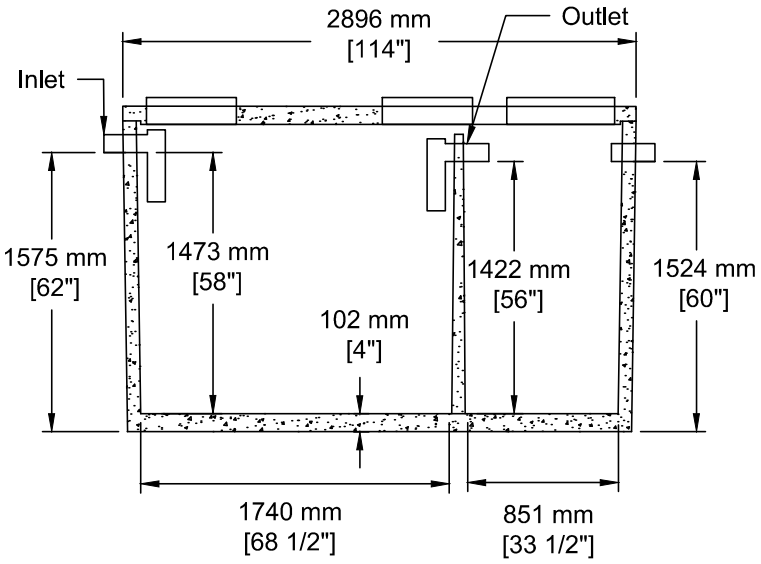

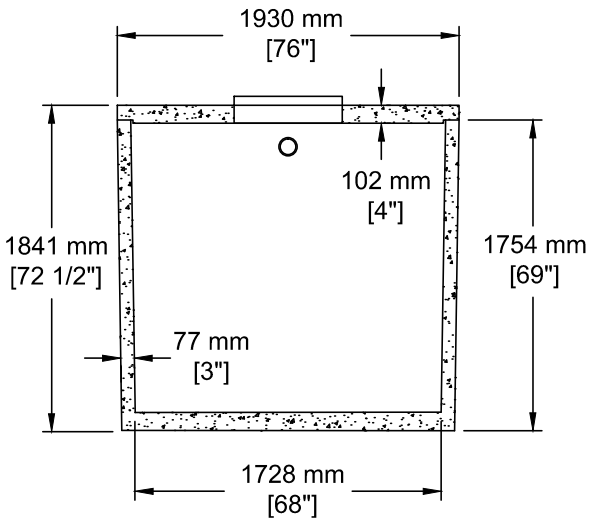

SOUTH OKANAGAN CONCRETE PRODUCTS LTD
Box 419, 11602 - 115 st Osoyoos, BC V0H 1V0
TEL: 250-495-7556
FAX: 250-495-3556
socp@socp.ca
www.socp.ca

(1500) TS-2Ch 4546 litres (1000 gal)
1-Comp ST / 2273 litres (500 gal)
Pump Chamber

Product #
0133