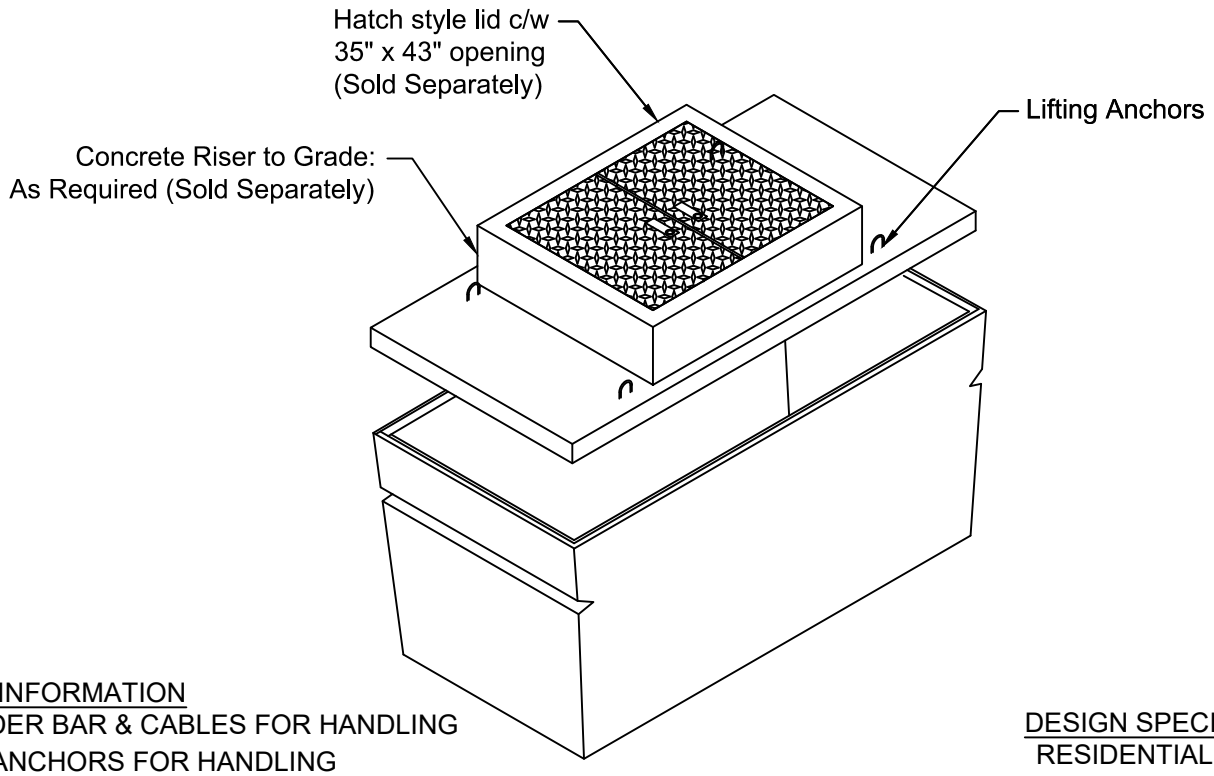

INSTALLATION INFORMATION

TANK - SPREADER BAR & CABLES FOR HANDLING
LID C/ 4 - ⅜" R-ANCHORS FOR HANDLING
GASKET: CONSEAL BUTYL SEALANT
WEIGHT: 2200 LBS / 998 KG (LID)
WEIGHT: 5700 LBS / 2586 KG (TANK)

DESIGN SPECIFICATION

RESIDENTIAL LOADING
BURIAL DEPTH - **NO GREATER THAN 1M**
MANUFACTURED IN ACCORDANCE WITH: CSA A23.4, B-66
ASTM C1227

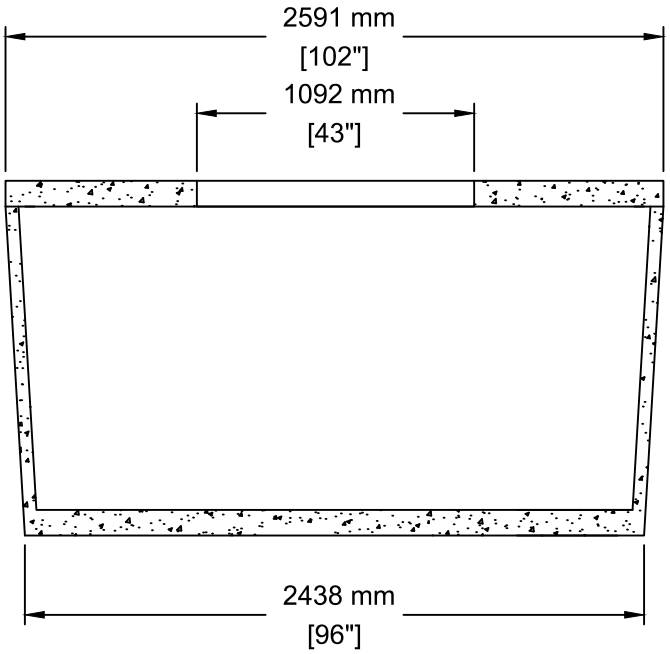

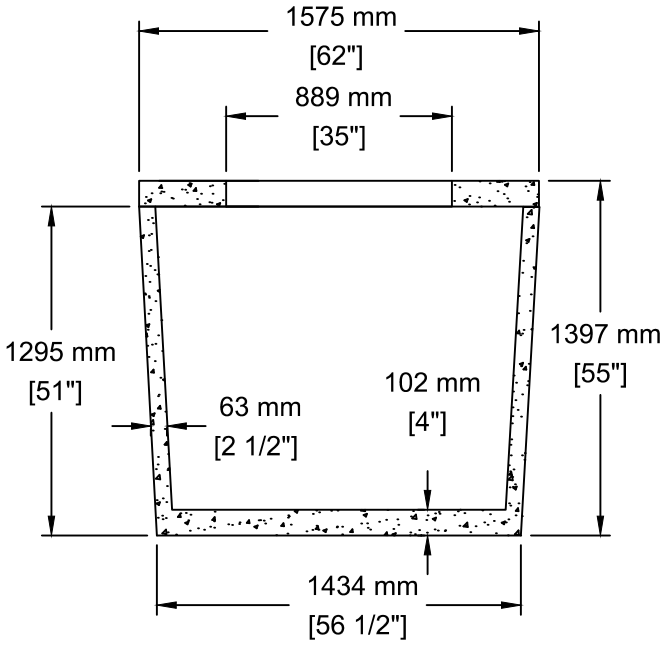

SOUTH OKANAGAN CONCRETE PRODUCTS LTD
Box 419, 11602 - 115 st Osoyoos, BC V0H 1V0
TEL: 250-495-7556
FAX: 250-495-3556
socp@socp.ca
www.socp.ca

(600) Water Meter Chamber c/w 35" x 43" Opening

Product #

0502