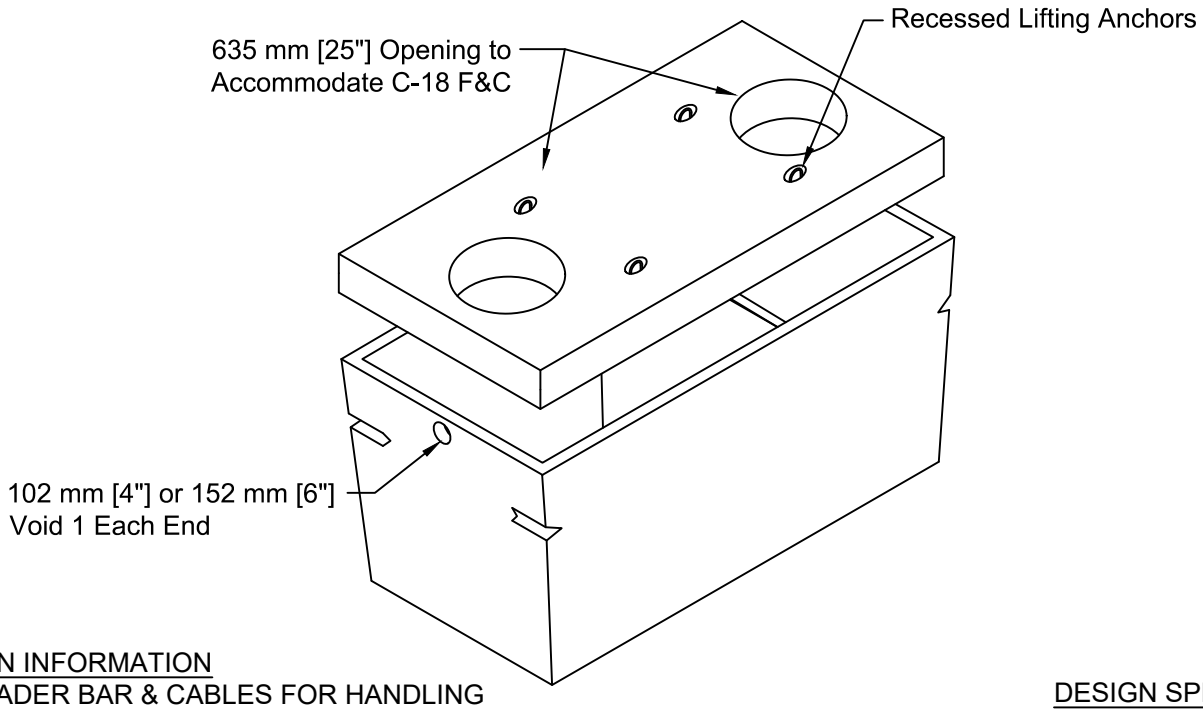

INSTALLATION INFORMATION

TANK - SPREADER BAR & CABLES FOR HANDLING
LID C/ 4 - 10 mm [⅜"] R-ANCHORS FOR HANDLING
GASKET: CONSEAL BUTYL SEALANT
WEIGHT: 1330 KG (LID)
WEIGHT: 3400 KG (TANK)

DESIGN SPECIFICATION

AASHTO - H-20 LOADING
BURIAL DEPTH - **MINIMUM 203 mm [8"]**
ASTM C1227
CSA B-66

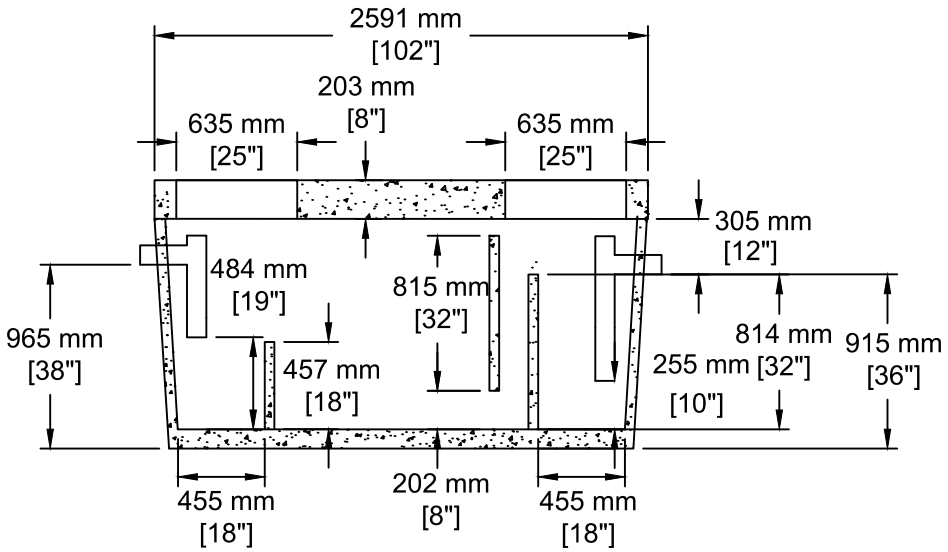

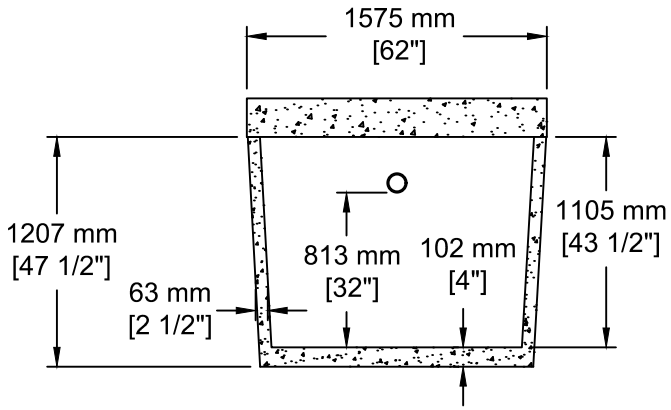

SOUTH OKANAGAN CONCRETE PRODUCTS LTD
TEL: 250-495-7556
socp@socp.ca
www.socp.ca
Box 419, 11602 - 115 st Osoyoos, BC V0H 1V0
FAX: 250-495-3556

2500 Litre (550 gal) OWS-API

Product #
0566