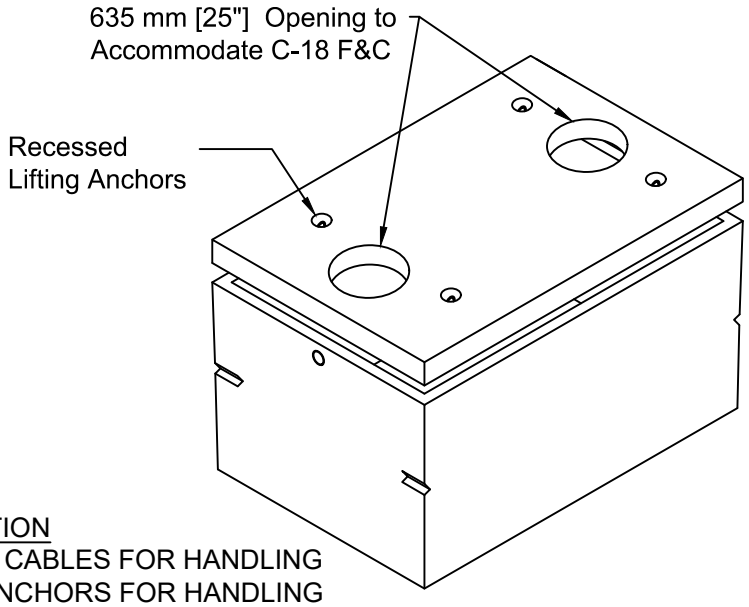

INSTALLATION INFORMATION

TANK - SPREADER BAR & CABLES FOR HANDLING
LID C/ 4 - 10 MM (3/8") R-ANCHORS FOR HANDLING
GASKET: CONSEAL BUTYL SEALANT
WEIGHT: LBS / KG (LID)
WEIGHT: LBS / KG (TANK)

DESIGN SPECIFICATION

INDUSTRIAL LOADING
BURIAL DEPTH - MIN 8"
MANUFACTURED IN ACCORDANCE WITH: CSA A23.4

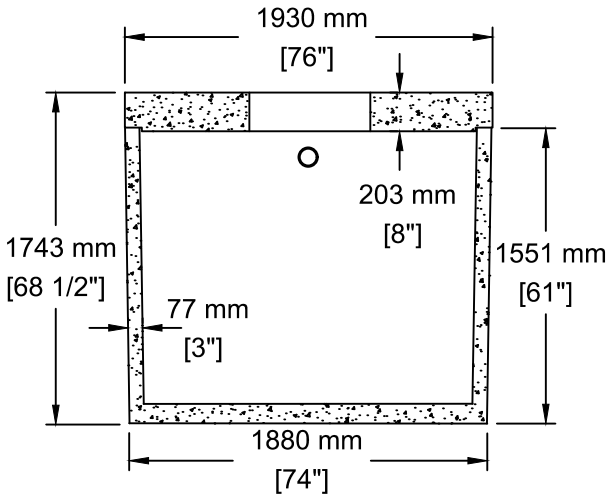

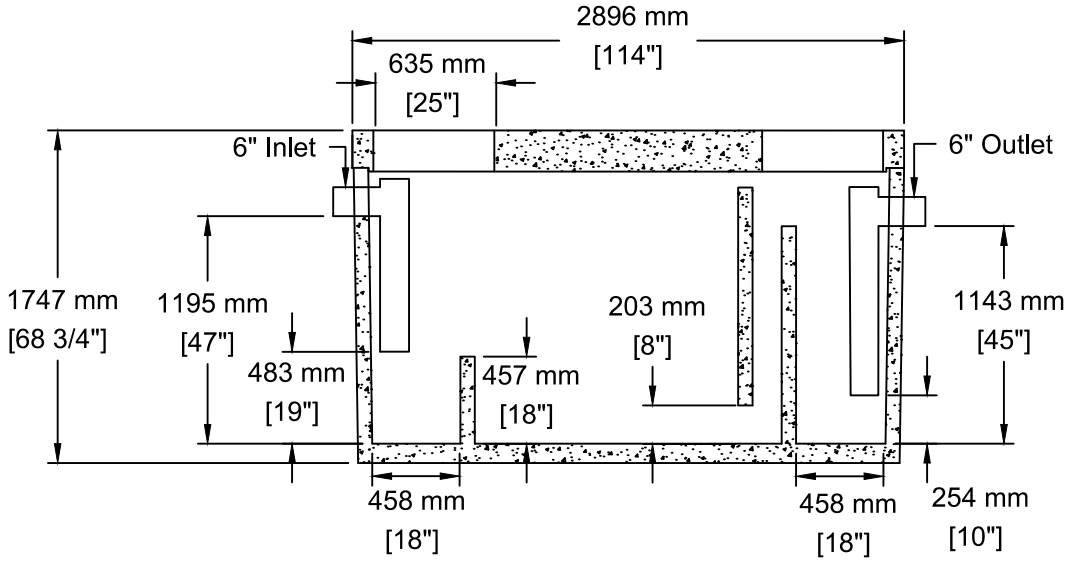

SOUTH OKANAGAN CONCRETE PRODUCTS LTD
Box 419, 11602 - 115 st Osoyoos, BC V0H 1V0
TEL: 250-495-7556
FAX: 250-495-3556
socp@socp.ca
www.socp.ca

5500 Litre (1215 gal)
OWS-API

Product #
0572